




8 pin chip in ZIF socket :

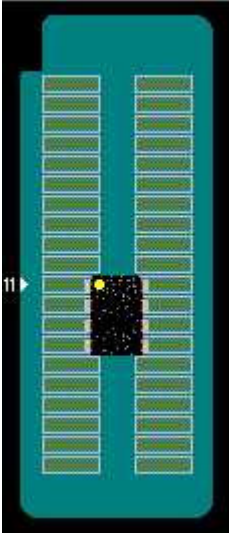


JP1 : 2-3 shorted
JP2 : 2-3 shorted




14 pin chip in ZIF socket :

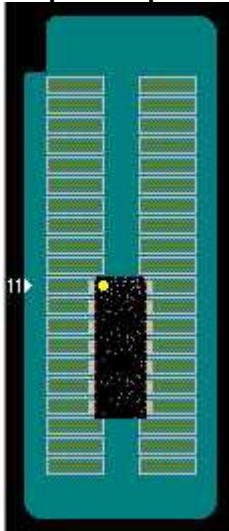

JP1 : 2-3 shorted
JP2 : 2-3 shorted




18 pin chip in ZIF socket :

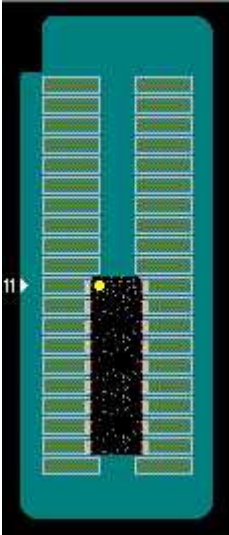

JP1 : 2-3 shorted
JP2 : 2-3 shorted

=====


28 pin chip in ZIF socket :

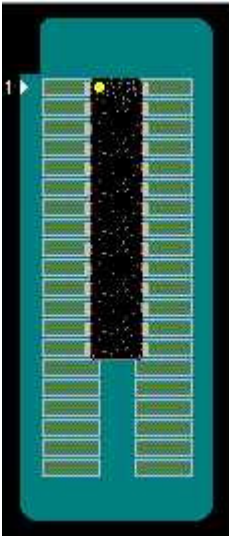

JP1 : 1-2 shorted
JP2 : 2-3 shorted

=====

40 pin chip in ZIF socket :

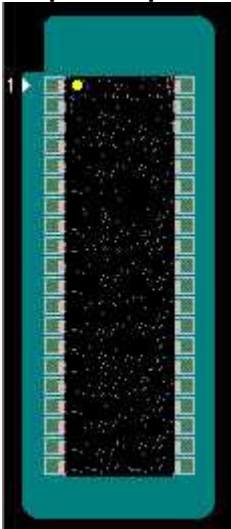


**JP1: 1-2 shorted
JP2: 2-3 shorted**

=====

24XXX EEPROM in ZIF socket :

(Software must be PonyProg V2.06f)

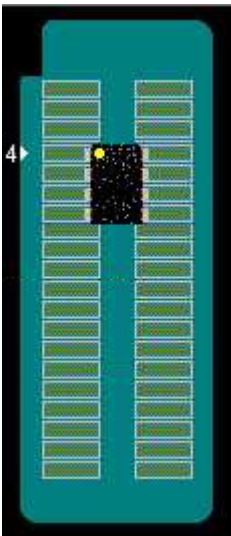

**JP1: 2-3 shorted
JP2: 2-3 shorted**